

## DSP660W 8W-30W Lamp Shape Garden Speaker



### *Features*

- Made of high-class alnico, never rust, Dual direction phonating, sounds abundantly;
- Dual direction lamp, sturdy and style graceful, suited for grass plot;
- 70/100V, 8-30W, with multiple terminals, suited for different field;
- Max. Sound Pressure Level  $100\pm 2\text{dB}$ , Effective Freq. Range 100Hz-14kHz;
- Weight 6.5 kg, standing steady;
- Waterproof driver, long-term durability, high sensitivity ( $90\pm 2\text{dB}$ ), sound clear and sonorousness.

### *Description*

DSP660W is a landscape garden speaker with built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.


DSP660W is made of dual direction phonating, sounds loudly. The shape is of dual direction lamp, steady and graceful, suitable for grassland.

It is an ideal choice for industrial and commercial applications in the outdoor area of train station, shopping mall, parking area and factory where background music and paging is needed. It is with IP6 waterproof level, which means it can directly exposed to outdoor severe environment. The high-class resin material is strongly resistant to cold, snow, ice, high temp and sunshine.


## Specification

<b>Model</b>	<b>DSP660</b>
<b>Full-range</b>	4''×6''×2,2.5''×2
<b>Rated Power</b>	15W
<b>Max Power</b>	30W
<b>Line Voltage</b>	70/100V
<b>Sensitivity(1M,1W)</b>	90±2dB
<b>Max SPL(1M)</b>	100±2dB
<b>Freq. Resp</b>	100Hz-14kHz
<b>Dimension(L×W×H)</b>	135×195×765mm
<b>Weight</b>	6.5kg


### FREQ. RESPONSE

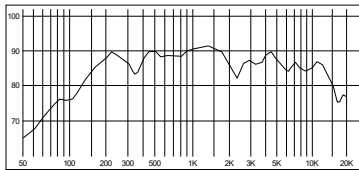


### DISTORTION

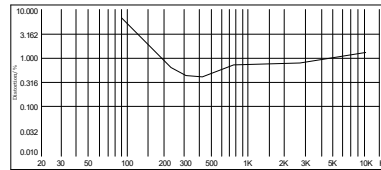

### DIMENSIONS



### INSTALLATION HOLE



## *Installation*

1. Setup a foundation like a platform with concrete and set 4 screws (8mm) stretching out 3cm in it as shown above after concrete rigidity continue;
2. Connect audio broadcasting wire to the speaker terminals according to the table below;

Power Terminals	Line Voltage	70V	100V
Red---Blue		8W	15W
Red---White		15W	30W <b>(Notice)</b>

**Notice: While broadcasting wire is quite long only.**

3. Fix the speaker system with 4 nuts on screws of the foundation;
4. Finally, examine whether it is steady.

### INSTALLATION