

DSP640 12W-45W Waterproof Rock Speaker



Features

- IP 6 waterproof level
- Max SPL: 102±2dB
- 6.5"×1 full-range driver
- High-class resin material
- High sensitivity: 88±2dB
- Heavy damage proof finish
- Built-in 100v/70v transformer
- Wide Freq.Resp.:80Hz-16kHz
- Power taps at 23W-45W@100V
- Landscape garden loudspeaker

Description

DSP640 is a landscape garden speaker. It has a built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.

The high-class resin enclosure is of rock shape and weatherproof. It is with heavy damage proof finish. Easy and secure installation in outdoor area.

It is an ideal choice for industrial and commercial applications in outdoor areas, such as train station, shopping mall, parking area and factory where background music and paging are needed.


Specification

Model	DSP640
Full-range	6.5"×1
Rated Power	23W
Max Power	45W
Line Voltage	70/100V
Sensitivity(1M,1W)	88±2dB
Max SPL(1M)	102±2dB
Freq. Resp.	80Hz-16kHz
Dimension(L×W×H)	250×360×420mm
Weight	7kg

DIMENSIONS



INSTALLATION HOLE



Installation


1. Setup a foundation like a round platform with concrete and set 3 screws (8mm) stretching out 3cm in it as shown above after concrete acidify continue;
2. Connect audio broadcasting wire to the speaker terminals according to the table below;

Power Terminals	Line Voltage	70V	100V
Red---Blue		13W	23W
Red---White		23W	45W

3. Fix the speaker system with 3 nuts on screws of the foundation;
4. Finally, examine whether it is steady.

FREQ. RESPONSE

(dB SPL, 1W, 1m)

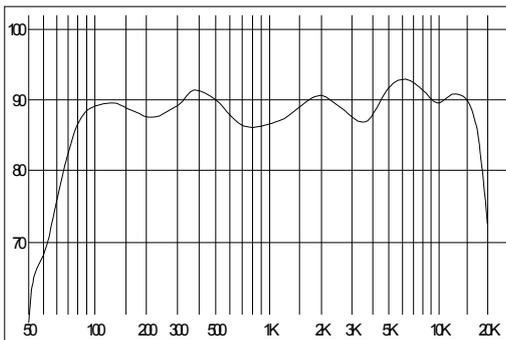

DISTORTION

(THD < 1.5% 1W, 1m, 2000Hz~10kHz)

