


D6536A

450W Active 15" Full Range Professional Speaker

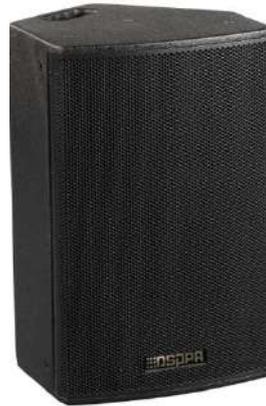

Description

D6536A professional active conference speaker is powered by high peak power switching power supply, with Class-D independent power amplifier. The speaker has rich even harmonics, mellow sound quality, with pure and natural sound quality performance. It is suitable for performances, conferences, squares, shopping mall, etc.

Features

- Rated Power: 450W
- Drive unit: 15" bass×1, 1.75" tweeter x1
- Frequency Response: 60 Hz – 18,000Hz
- Sensitivity: 98 ± 2 dB
- Max. SPL: 125 ± 2 dB
- High peak power switching power supply
- Class-D independent power amplifier
- With one XLR input and one XLR output
- Qualcomm filter selection: 20Hz~400Hz optional
- Excellent mobile occasion application;
- Dual professional power interface.

Specifications

Model	D6536A
Drive Unit	15" bass×1, 1.75" tweeter x1
Freq. Response	60 Hz – 18,000Hz
Speaker Sensitivity	98±2dB
Max. SPL	125±2dB
Active Signal Input Impedance	20 kΩ

Amplifier Power	800W
Speaker Continuous Power	450W (AES)
Directivity (HxV)	90°x60°
Amplifier Distortion	<0.05%
Damping Coefficient	>250
Working Voltage	AC220V/50Hz
Dimensions (Height x Width x Depth)	696mmx456mmx446mm
Weight	28kg

Dimensions

